

VIGOR BATTERY


VALVE REGULATED LEAD ACID BATTERY

Model No : NP 65 -12 12 V 65 AH



Plane Chart:


Unit:(mm) Terminal type:(T3)

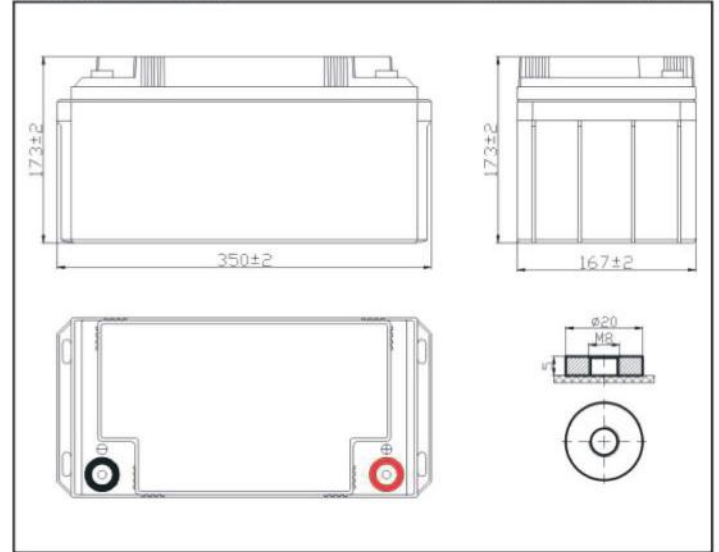


Parameter Chart:

Volts		12V	
Capacity(25°C)	(K10) 10 hours rate (6.5A)	65Ah	
Discharge Current Testing (25°C)	1 hours rate (35.7A)	36Ah	
	3 hours rate (16.2A)	49Ah	
Internal Resistance	Full Charged Battery 25°C	5.6mΩ	
Capacity Affected By Temperature	50°C	104%	
	25°C	100%	
	0°C	83%	
	-20°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 19.5A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (+-%2)		19.5 Kg.	

Residual Capacity

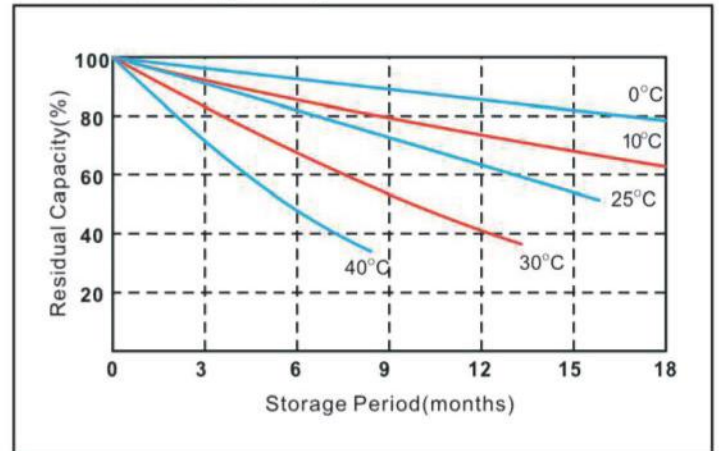


Discharge Current 25°C

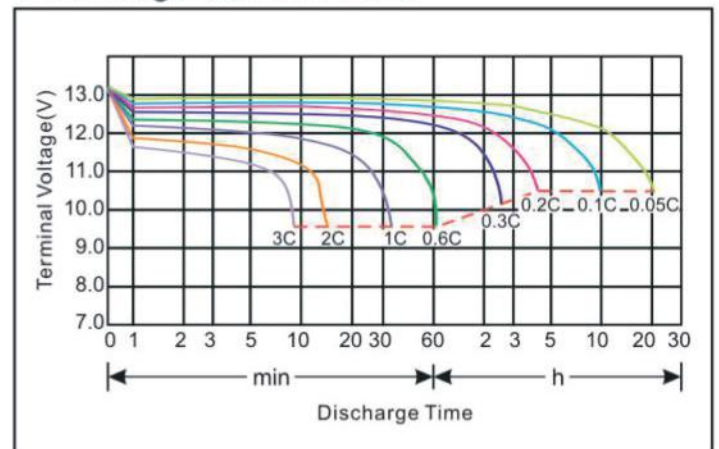


★ The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

Model No : NP 65 -12 12 V 65 AH

Constant voltage charging characteristics

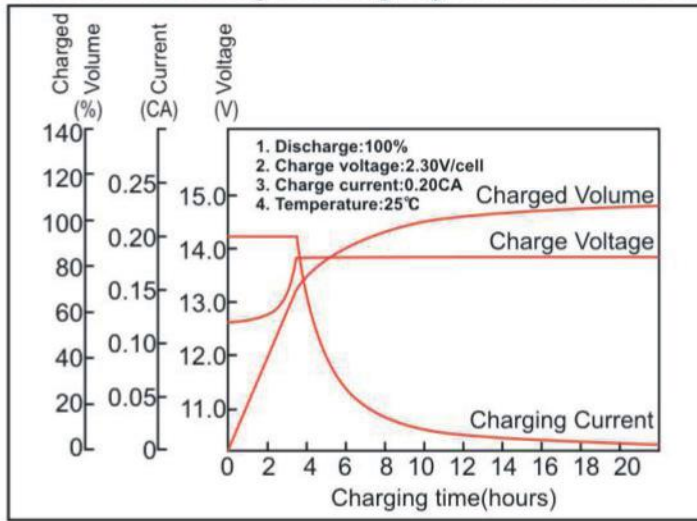

Float Life

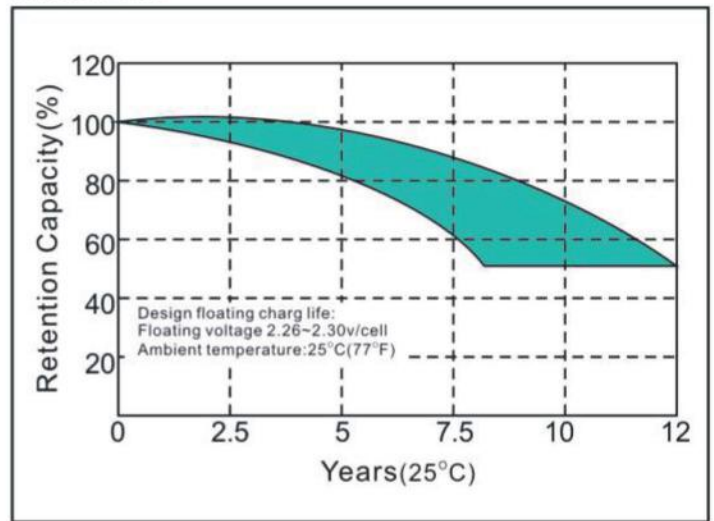

Constant Current Discharge Characteristics(A,25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	205.4	143.3	110.2	67.1	41.1	23.7	16.7	11.7	7.9	6.7	3.5
10.2V	195.4	136.3	106.2	64.4	39.5	23.4	16.5	11.5	7.9	6.6	3.5
10.5V	190.4	132.3	103.2	63.1	38.6	23.2	16.3	11.4	7.8	6.5	3.4
10.8V	183.4	128.3	100.2	61.2	37.5	22.9	16.2	11.3	7.7	6.5	3.4

Constant Power Discharge Characteristic(Watt,25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	2157.3	1547.1	1210.4	753.5	467.9	274.5	196.4	138.3	94.1	79.6	41.5
10.2V	2049.1	1469.9	1161.3	723.4	449.9	270.5	194.4	136.3	93.3	79.0	41.5
10.5V	1999.0	1427.9	1132.3	707.4	438.9	268.5	192.4	135.3	92.8	78.1	41.1
10.8V	1925.8	1381.8	1104.2	687.4	426.9	265.5	191.4	134.3	91.9	77.8	40.9

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.



MSDS