

# PhotoVoltaic / Solar Cable H1Z2Z2-K (1.5kV DC)

H1Z2Z2-K 1x4 mm<sup>2</sup>

## Contact

Sales & Marketing  
Phone: +90 212 266 0160  
alper.altinok@nexans.com

Nexans Ref.: 10575635

Country Ref.: TR

EAN 13: 8680969211611

1.5 kV DC Voltage, single core solar cables

## DESCRIPTION

### Application:

These state-of-art AC 1.0/1.0 and DC 1.5kV cross-linked cables offer exceptional performances, easy installation and long-term reliability for solar plant. They link photovoltaic panels for Utility-Scale solar plants or rooftops, and also connect them to the array box (if existing), or potentially to the inverter.

Designation: H1Z2Z2-K


Standard: EN 50618

### Current Rating Temperature

Ambient temperature = 60°C

Maximum conductor temperature = 120°C

Water Resistant to AD8 According to EN 50525-2-21, Annex E

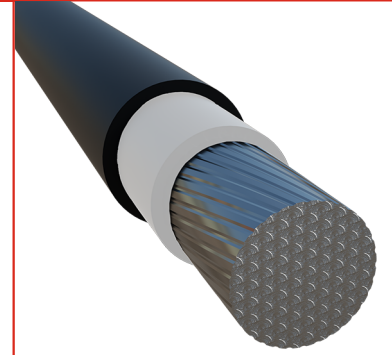

## STANDARDS

International EN 50618



Halogen free  
IEC 60754-1



Conductor flexibility  
Flexible class 5



Rated Voltage U<sub>0</sub>/U  
(Um)  
1.0/1.0 (1.2) kV AC  
1.5/1.5 (1.8) kV DC



Flame retardant  
IEC 60332-1-2



Operating temp.  
-40 ... 90 °C



Smoke density  
IEC 61034



Gases corrosivity  
IEC 60754-2



Max. conductor  
temp.in service  
120 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 9/1/24 www.nexans.com.tr Page 1 / 2

 Nexans

# PhotoVoltaic / Solar Cable H1Z2Z2-K (1.5kV DC)

H1Z2Z2-K 1x4 mm<sup>2</sup>

## Contact

Sales & Marketing  
Phone: +90 212 266 0160  
alper.altinok@nexans.com

## CHARACTERISTICS

### Construction characteristics

Conductor material	Tin Coated Copper Class 5 acc. To EN 60228
Insulation	Cross-linked (XL) HFFR acc. to EN 60811 and EN 60216-1-2
Halogen free	IEC 60754-1
Conductor flexibility	Flexible class 5
Outer sheath	Cross-linked (XL) HFFR acc. to EN 60811 and EN 60216-1-2
Sheath colour	Black

### Dimensional characteristics

Number of cores	1
Conductor cross-section	4 mm <sup>2</sup>
Nominal outer diameter	5.7 mm
Approximate weight	60 kg/km
Conductor diameter (mm)	
Nominal insulation thickness	0.7 mm
Nominal outer sheath thickness	0.8 mm

### Electrical characteristics

Rated Voltage U <sub>0</sub> /U (Um)	1.0/1.0 (1.2) kV AC 1.5/1.5 (1.8) kV DC
Max. DC resistance of the conductor at 20°C	5.09 Ohm/km
Permissible current rating in air 60°C	55 A
Permissible current rating on a tray 60°C	52 A

### Usage characteristics

Flame retardant	IEC 60332-1-2
Operating temperature, range	-40 ... 90 °C
Short-circuit max. conductor temperature	250 °C
Smoke density	IEC 61034
Gases corrosivity	IEC 60754-2
Max. conductor temperature in service	120 °C
Ozone resistance	EN 50396:2005
Resistance to vibrations	Condition AH 3 (sever industrial conditions) acc. to HD 60364-5-52
U.V resistance	EN 50289-4-17 method A, for 720h. Nexans prestige test 4000h
Water proof	Passed 100 days 50°C water immersion test of EN 50525-2-21 annex D and E
Weather resistance	Excellent

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 9/1/24 www.nexans.com.tr Page 2 / 2

